



Nothing but **HEAVY DUTY.**[™]

ELECTRICAL TRADE SOLUTIONS // 2024-25

ELECTRICIAN



FORCELOGIC[™] CABLE CUTTERS

CABEL CRIMPERS



M18 FORCELOGIC[™]

M18 SHEAR BOLT TOOL



UP TO 1000 MM²
CABLE SIZE
& Ø 78 MM
CONNECTORS.

M18 KNOCKOUT PUNCH



UP TO 60 KN
OF FORCE.

MILWAUKEE[®] PPE, HAND TOOLS & ACCESSORIES



SAFETY.
PRODUCTIVITY.

milwaukeetool.lv

M18[™] FORCELOGIC[™] CABLE CUTTERS

M18 HCC75R-502C | ART. NR. 4933459271

M18[™] FORCELOGIC[™] HYDRAULIC REMOTE UNDERGROUND CABLE CUTTER

FEATURES:

- FORCE LOGIC[™] hydraulic remote underground cable cutter cuts cables up to $\varnothing 75$ mm in less than 10 seconds with 77.8 kN of force
- Wireless remote communicates with the tool via a mutually exclusive Bluetooth[®] connection, removing any physical connection to the tool and allowing Linemen to make remote cuts wirelessly
- Balanced design, handle and hang hook enable easiest set-up in vaults
- Cuts aluminium & copper cables up to 75 mm
- Green LED light on wireless remote gives positive indication that the tool is done cutting
- Converts from Local to Remote cutting mode easily
- Open jaw design provides easiest access in trenches
- ONE-KEY[™] tool tracking & security



SAFE
SOLUTION
FOR REMOTE USE



**QUICK AND SAFE
CUTS UP TO
30 M DISTANCE**



REDLITHIUM[™]

ALSO AVAILABLE WITHOUT THE REMOTE:

M18[™] FORCELOGIC[™]

HYDRAULIC UNDERGROUND CABLE CUTTER

M18 HCC75-502C | ART. NR. 4933459269

INCLUDES:



Milwaukee
PERFECT MATCH

**CABLE CUTTER
BLADES FOR
M18 HCC75 &
M18 HCC75R**

49162774



M18 ONEHCC

M18 FORCELOGIC™ HYDRAULIC 35 MM CABLE CUTTER
350° ROTATION

Access to areas with limited space

OPTIMAL BLADE GEOMETRY

Cutting time under 3 seconds

A SINGLE TAP

Cuts with 53 Kn of force

BALANCED DESIGN

For better control and ergonomics

ONE-KEY™

Manage, track and customize

REPLACEABLE JAWS

ACSR cable, steel wire rope, fine wire, standard copper cable and aluminum cable

LED LIGHT

Illuminates the workspace

M18™ REDLITHIUM™ 2,0 AH BATTERYDelivers 250+ cuts in 4 x 35 mm² copper cables per charge**CU/AL SET**M18 ONEHCC-201C CU/AL-SET
ART. NR. **4933464301**

- For cutting copper and aluminum cable (Class 1-4)
- Comes with Cu / Al jaw
- Max. cut diameter 35 mm
- Includes 2.0 Ah REDLITHIUM™ battery, M12-18 C charger, kitbox

**CU/AL SET**M18 ONEHCC-201C ACSR SET
ART. NR. **4933464304**

- For cutting steel-reinforced cables Fe / Al
- Comes with ACSR jaw
- Max. cut diameter 22.5 mm
- Includes 2.0 Ah REDLITHIUM™ battery, M12-18 C charger, kitbox

**CU/AL SET**M18 ONEHCC-201C FSW SET
ART. NR. **4933464309**

- For cutting flexible multiwire cable (Class 5)
- Comes with FSW jaw
- Max. cut diameter 35 mm
- Includes 2.0 Ah REDLITHIUM™ battery, M12-18 C charger, kitbox

**CU/AL SET**M18 ONEHCC-0C SWA SET
ART. NR. **4933464306**

- For cutting steel reinforced Cu / Al cable
- Comes with SWA jaw
- Without battery and charger, with kitbox


**JAWS & BLADES FOR
M18 ONEHCC CABLE CUTTER**

	1	Cu/Al: Jaw and blade set for cable cutter, for copper / aluminum. 1 x 500 mm ² in aluminum and 1 x 400 mm ² in copper. Not suitable for fine wire cable. Max. cut ø 35 mm	4932430839		3	GUY Wire: Cutting jaw and blades for EHS grade guy wire, stay wire & steel wire according to DIN48201/3 guy wire of grade ST1/ST2/ST3. Not suitable for fine stranded steel ropes. Max. cutting ø15 mm	49162777
		Cu/Al standard copper & aluminium cable cutting blades. The blades fit for the Cu/Al cutting jaws for M18HCC & ONEHCC cutters + M18 HCCT crimper cutting jaw	4932464498			EHS guy wire/steel wire cutting blades. For M18 HCC & ONEHCC cable cutters.	48442777
	2	ACSR: Cable cutter jaw and blade set for cutting aluminium-steel transmission cable. ACSS-aluminium conductor steel supported cable and ACSR-aluminium conductor steel reinforced cable i.e. 94-AL1 / 15-ST1A (EN 50182). Not suitable for armoured cable or steel rods. Max. cutting ø 22.5 mm	49162773		4	Cable cutter jaw and blades for class 5 fine stranded wire and class 6 finest stranded wire according to IEC 60228/DIN VDE 0295 standards. Also suitable for high flexible data- and telecomm cable. Not suitable for thick stranded cables. Max. cutting ø 35 mm	49162778
		cable cutter blades for ACSS and ACSR jaws. Not suitable for armoured cable or steel rods. For M18 HCC & ONEHCC cable cutters	48440412			FSW fine stranded wire cutting blade For M18 HCC & ONEHCC cable cutters.	48442778
						SWA: Armored cable cutting Jaw for M18 HCC. Max. cutting ø 35 mm	4932464867

M18 HCC45-522C | ART. NR. **4933459266**

M18 FORCELOGIC™ HYDRAULIC 44 MM CABLE CUTTER

FEATURES:

- FORCE LOGIC™ hydraulic cable cutter cuts ACSR/ACSS cables up to $\varnothing 44$ mm in less than 9 seconds with 77.8 kN of force
- Patent pending jaw design enables opening with just two fingers, enhancing alignment while delivering easiest operation with Class 3 gloves
- Wire automatically closes the jaw, providing hands-free jaw closure and the easiest mid-span cuts. Fully balanced design delivers the best control
- 340° rotatable head powered by a 77.8 kN hydraulic pump delivers the fastest transmission wire cuts for enhanced productivity
- ONE-KEY™ tool tracking & security



INCLUDES:



M18 HCC45



M18 B5



M12-18 C



KITBOX

PERFECT MATCH

**ACSR BLADES
FOR
M18 HCC45**

49162775






SCAN THE QR CODE
AND SEE THE FULL
RANGE OF TOOLS FOR
ELECTRICIAN

M18 HSFC125R-802C | ART. NR. 4933492421

M18 FORCELOGIC™ HYDRAULIC 125 MM SAFETY CABLE CUTTER**FEATURES:**

- FORCE LOGIC™ Safety Cutter allows linemen to cut aluminium, copper and armored cables up to $\phi 125$ mm remotely, removing any physical connection to the tool
- Enhanced remote control lets users start, pause and reverse the cutting blade all from a distanced position of complete safety
- Green LED lights on wireless remote gives positive indication that the cable is cut through blade positioning sensors
- Easily converts from Remote cutting mode to Manual mode
- IP54 rated ingress protection with sealed battery cover delivers best protection in harsh environments such as dirt, dust and moisture
- Closed cutting head physically separates cables in a trench that will be cut from others
- Adjustable side handle, in-line tool design and hang hook enable easiest set-up in trenches and vaults
- Integrated quick connection point on cutting head allows users to easily ground the tool
- 180° rotatable head allows easy alignment of the tool in narrow trenches
- ONE-KEY™ tool tracking & security

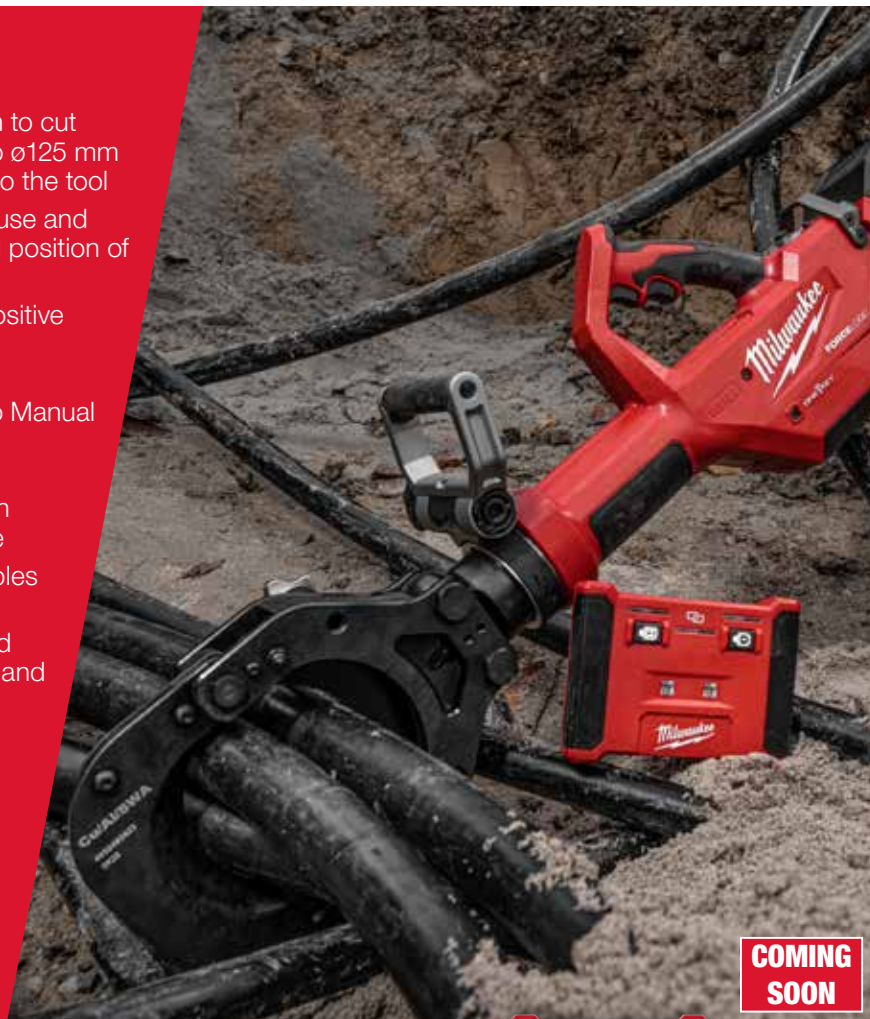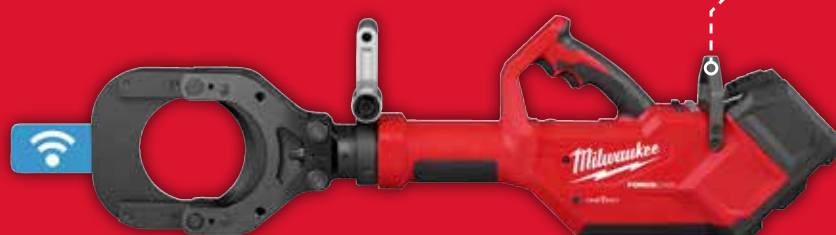INCLUDES:**COMING
SOON****REMOTE CUTS
WIRELESSLY**SAFE
SOLUTION FOR
REMOTE USE**REDLITHIUM™**

SCAN THE QR CODE
AND SEE THE FULL
RANGE OF TOOLS FOR
ELECTRICIAN



M18 HCC125-801C | ART. NR. 4933492419

M18 FORCELOGIC™ HYDRAULIC 125 MM SAFETY CABLE CUTTER

FEATURES:

- FORCE LOGIC™ Safety Cutter allows linemen to cut aluminium, copper and armored cables up to $\varnothing 125$ mm remotely, removing any physical connection to the tool
- Adjustable side handle, in-line tool design and hang hook enable easiest set-up in trenches and vaults
- Enhanced remote control lets users start, pause and reverse the cutting blade all from a distanced position of complete safety
- Closed cutting head physically separates cables in a trench that will be cut from others
- IP54 rated ingress protection with sealed battery cover delivers best protection in harsh environments such as dirt, dust and moisture
- 180° rotatable head allows easy alignment of the tool in narrow trenches kohdistamisen kapeissa kaivanteissa
- ONE-KEY™ tool tracking & security



INCLUDES:


**COMING
SOON**
REDLITHIUM™

M12 CC-0 | ART. NR. 4933431600

M12 SUB COMPACT CABLE CUTTER

FEATURES:

- Professional capacity $\varnothing 32$ mm
- Extended run time - delivers up to 60 cuts of 4 x 35 mm² copper per charge
- Compact front end - goes straight to the cable in panels
- Superior cut quality - delivers a flat, round and installation ready cut
- Auto-release lever - provides the ability to cut, reload and quickly repeat

INCLUDES:


**BLADES FOR
MODEL
M12 CC**
4932430070

REDLITHIUM™

M18TM FORCELOGICTM PRESSING TOOLS

CRIMPS CONNECTORS UP TO 400 MM²



M18 HCCT109/42-522C | ART. NR. **4933459273**

M18 FORCELOGICTM HYDRAULIC 109 KN CABLE CRIMPER

FEATURES:

- 42 mm jaw opening and 350° head rotation provides easy positioning and access, even for large connectors
- PFMTM (Predictive Force Monitoring) with auto complete ensures full pressure and provides instant pressure verification with green indicator
- Universal die reception to fit most common U-Dies (C shaped dies) on the market
- Pre-crimp battery check automatically ensures enough charge to complete each crimp



INCLUDES:



REDLITHIUMTM

M18 HDCT-202C | ART. NR. **4933471950**

M18 FORCELOGICTM HYDRAULIC DIELESS CRIMPER

FEATURES:

- Crimps connectors on flexible wire from 10 to 300 mm² without changing dies
- 180° rotating head
- Sealed electronics resist harsh environments with dirt, dust and moisture
- Pre-crimp battery check automatically ensures enough charge to complete each crimp



INCLUDES:



REDLITHIUMTM

M18 HCCT-201C | ART. NR. 4933451194

M18 FORCELOGIC™ HYDRAULIC 53 KN CABLE CRIMPER

FEATURES:

- Crimps connectors up to 300 mm² in less than 3 seconds with 53 kN of force
- Universal die reception to fit most common 60 kN U-Dies (C shaped dies) on the market
- Allows crimping of connectors up to 300 mm²
- PFM™ (Predictive Force Monitoring)
- Compact in-line and slim jaw design with 350° rotatable head allows easy crimps, even in narrow spaces
- 2 in 1 solution: crimping jaw can be exchanged for an CU/AL cable cutting jaw



INCLUDES:



M18 HCCT



M18 B2



M12-18 C



KITBOX


REDLITHIUM™

CABLE CUTTING JAW FOR M18 HCCT:

HCCT cutting jaw Cu/AL, class 2

ART. NR. 4932464497

Cu/Al cable cutting blades

ART. NR. 4932464498


Milwaukee
PERFECT MATCH

M18 ONEHCCT60-202C | ART. NR. 4933479684

M18 FORCELOGIC™ HYDRAULIC 60 KN CABLE CRIMPER

Also available as 0-version M18 ONEHCCT60 | ART. NR. 4933479683

FEATURES:

- Crimps connectors in less than 5 seconds with 60 kN of force
- Universal die reception is compatible with MILWAUKEE® 22-series die range and most common 60 kN U-dies (C shaped dies) on the market
- Certified also for PK and KRF crimping dies
- Crimps connectors up to 300 mm²
- Easy to reach electronic release button within grip area allows users to reset a crimp conveniently at any time



INCLUDES:



M18 ONEHCCT60



2 x M18 B2



M12-18 C



KITBOX

REDLITHIUM™

CRIMP DIE KITS

DIE KITS FOR MODELS M18 HCCT/ONEHCCT60

DIN 46235 - DIN22 CU KIT - ART. NR. 4932471997

(11 PC SET) - 16, 25, 35, 50, 70, 95, 120, 150,
185, 240, 300 MM²



DIN 46329 - DIN22 AL KIT - ART. NR. 4932471998

(9 PC SET) - 16/25, 35, 50, 70, 95/120, 150, 185,
240 & 300 MM²



R22 KRF CU KIT - ART. NR. 4932493582

(12 PC SET) - 10, 16, 25, 35, 50, 70, 95, 120, 150,
185, 240 & 300 MM²



DIE KITS FOR MODELS M18 HCCT109/42

DIN 46235 - DIN13 CU KIT - ART. NR. 4932472000

(11PC SET) - 16, 25, 35, 50, 70, 95, 120, 150,
185, 240 & 300 MM²



DIN 46329 - DIN13 AL KIT - ART. NR. 4932472001

(9 PC SET) - 16/25, 35, 50, 70, 95/120, 150,
185, 240 & 300 MM²



CRIMP DIES R13 OU/KRF 300 - ART. NR. 4932498404



R22 OU/KRF CRIMPING DIES FOR M18 ONEHCCT60

MODEL		ART. NR.
Crimping die R22 OU/KRF 10	 OUNEVA & ELPRESS CERTIFIED KITS FOR COPPER!	4932479378
Crimping die R22 OU/KRF 16		4932479379
Crimping die R22 OU/KRF 25		4932479380
Crimping die R22 OU/KRF 35		4932479381
Crimping die R22 OU/KRF 50		4932479382
Crimping die R22 OU/KRF 70		4932479383
Crimping die R22 OU/KRF 95		4932479384
Crimping die R22 OU/KRF 120		4932479385
Crimping die R22 OU/KRF 150		4932479386
Crimping die R22 OU/KRF 165		4932479387
Crimping die R22 OU/KRF 240		4932479388
Crimping die R22 OU/KRF 300		4932479389
Crimping die R13 OU/KRF 300		4932498404

REDLITHIUM™ BATTERIES AND CHARGERS

**M18 5,0 AH
NRG PACK**
M18 NRG-502 |
ART. NR.
4933459217



M18 2,0 AH BATTERY
M18 B2 | ART. NR. 4932430062



M18 5,0 AH BATTERY
M18 B5 | ART. NR. 4932430483



**M18 12,0 AH HIGH
OUTPUT™ BATTERY**
M18 HB12 | ART. NR. 4932464260



**M12 - M18
FAST CHARGER**
M12-18 FC | ART. NR. 4932451079



**M18 M14™-18™
MULTIBAY CHARGER**
M1418C6 | ART. NR. 4932430086



**SCAN THE
QR CODE TO
EXPLORE THE
BATTERY &
CHARGER
RANGE**



CRIMPING DIES


M18 HCCT & M18 HCCT60					M18 HCCT109/42		
Round Cu / Al	Size (mm ²)	Imprint code	Model	Art. Nr.	Hex Cu	Model	Art. Nr.
	16	-	RU22 Cu/Al 16	4932451780		RU13 Cu/Al 16	4932459483
	35 / 25	-	RU22 Cu35/Al 25	4932451781		RU13 Cu35/Al 25	4932459484
	50 / 35	-	RU22 Cu50/Al 35	4932451782		RU13 Cu50/Al 35	4932459485
	70 / 50	-	RU22 Cu70/Al 50	4932451783		RU13 Cu70/Al 50	4932459486
	95 / 70	-	RU22 Cu95/Al 70	4932451784		RU13 Cu95/Al 70	4932459487
	120 / 95	-	RU22 Cu120/Al 95	4932451785		RU13 Cu120/Al 95	4932459488
	150 / 120	-	RU22 Cu150/Al 120	4932451786		RU13 Cu150/Al 120	4932459489
	185 / 150	-	RU22 Cu185/Al 150	4932451787		RU13 Cu185/Al 150	4932459490
	240 / 185	-	RU22 Cu240/Al 185	4932451788		RU13 Cu240/Al 185	4932459491
	300 / 240	-	RU22 Cu300/Al 240	4932451789		RU13 Cu300/Al 240	4932459492
Hex Cu Cable lug DIN 46235 Splice sleeve DIN 46267	6	5	DIN22 Cu 6	4932464861	Hex Cu	-	-
	10	6	DIN22 Cu 10	4932464862		-	-
	16	8	DIN22 Cu 16	4932451744		DIN13 Cu 16	4932459465
	25	10	DIN22 Cu 25	4932451745		DIN13 Cu 25	4932459466
	35	12	DIN22 Cu 35	4932451746		DIN13 Cu 35	4932459467
	50	14	DIN22 Cu 50	4932451747		DIN13 Cu 50	4932459468
	70	16	DIN22 Cu 70	4932451748		DIN13 Cu 70	4932459469
	95	18	DIN22 Cu 95	4932451749		DIN13 Cu 95	4932459470
	120	20	DIN22 Cu 120	4932451750		DIN13 Cu 120	4932459471
	150	22	DIN22 Cu 150	4932451751		DIN13 Cu 150	4932459472
Hex Cu Cable lug R22 standard	16	16	R22 Cu 16	4932451755		DIN13 Cu 185	4932459473
	25	25	R22 Cu 25	4932451756		DIN13 Cu 240	4932459474
	35	35	R22 Cu 35	4932451757		DIN13 Cu 300	4932459475
	50	50	R22 Cu 50	4932451758		R13 Cu 16	4932459494
	70	70	R22 Cu 70	4932451759		R13 Cu 25	4932459495
	95	95	R22 Cu 95	4932451760		R13 Cu 35	4932459496
	120	120	R22 Cu 120	4932451761		R13 Cu 50	4932459497
	150	150	R22 Cu 150	4932451762		R13 Cu 70	4932459498
	185	185	R22 Cu 185	4932451763		R13 Cu 95	4932459499
	240	240	R22 Cu 240	4932451764		R13 Cu 120	4932459500
Dyp press Cu Cable lug: DIN 46234 Cabel lug adaptor: DIN 46230 Splice sleeve: DIN 46341	300	300	R22 Cu 300	4932451765		R13 Cu 150	4932459501
	400	400	-	-		R13 Cu 185	4932459502
	16	16	Q22 CU 16	4932451766		R13 Cu 240	4932459503
	25	25	Q22 CU 25	4932451767		R13 Cu 300	4932459504
	35	35	Q22 CU 35	4932451768		R13 Cu 400	4932459505
	50	50	Q22 CU 50	4932451769		Q13 CU 16	4932459477
Hex Al DIN aluminum for aluminum cable lugs and connectors (DIN 46329, 46267 1 and 2, DIN EN 50182)	70	70	Q22 CU 70	4932451770		Q13 CU 25	4932459478
	95	95	-	-		Q13 CU 35	4932459479
	16 / 25	12	DIN22 AL 16/25	4932451771		Q13 CU 50	4932459480
	35	14	DIN22 AL 35	4932451772		Q13 CU 70	4932459481
	50	16	DIN22 AL 50	4932451773		Q13 CU 95	4932459482
	70	18	DIN22 AL 70	4932451774		DIN13 AL 16/25	4932459506
	95 / 120	22	DIN22 AL 95/120	4932451775		DIN13 AL 35	4932459507
	150	25	DIN22 AL 150	4932451776		DIN13 AL 50	4932459508
	185	28	DIN22 AL 185	4932451777		DIN13 AL 70	4932459509
	240	32	DIN22 AL 240	4932451778		DIN13 AL 95/120	4932459510
	300	34	DIN22 AL 300	4932451779		DIN13 AL 150	4932459511
						DIN13 AL 185	4932459512
						DIN13 AL 240	4932459513
						DIN13 AL 300	4932459514

CRIMPING DIES

M18 HCCT & M18 HCCT60					M18 HCCT109/42		
Copper tubular cable lugs and connectors L series	16	8	L22 Cu 16	4932464487		L13 Cu 16	4932464500
	25	10	L22 Cu 25	4932464488		L13 Cu 25	4932464501
	35	12	L22 Cu 35	4932464489		L13 Cu 35	4932464502
	50	14	L22 Cu 50	4932464490		L13 Cu 50	4932464503
Hex 	70	16	L22 Cu 70	4932464491		L13 Cu 70	4932464504
	95	18	L22 Cu 95	4932464492		L13 Cu 95	4932464505
	120	20	L22 Cu 120	4932464493		L13 Cu 120	4932464506
	150	22	L22 Cu 150	4932464494		L13 Cu 150	4932464507
	185	25	L22 Cu 185	4932464495		L13 Cu 185	4932464508
	240	28	L22 Cu 240	4932464496		L13 Cu 240	4932464509
	300	32	-	-		L13 Cu 300	4932464510
End sleeve	16	-	-	-		AEH13 Cu 16	4932459515
	25	-	-	-		AEH13 Cu 25	4932459516
	35	-	-	-		AEH13 Cu 35	4932459517
	50	-	-	-		AEH13 Cu 50	4932459518
	70	-	-	-		AEH13 Cu 70	4932459519
	95	-	-	-		AEH13 Cu 95	4932459520
	120	-	-	-		AEH13 Cu 120	4932459521
	150	-	-	-		AEH13 Cu 150	4932459522
	185	-	-	-		AEH13 Cu 185	4932459523
	240	-	-	-		AEH13 Cu 240	4932459524
C-press	10	-	C22 Cu10/C4	4932464863		-	-
	16	-	C22 Cu16/C5	4932464864		C13 Cu 16	4932459525
Oval 	25	-	C22 Cu25/C6	4932464865		C13 Cu 25	4932459526
	35	-	C22 Cu50/C8C9	4932464866		C13 Cu 35	4932459527
	50	-	-	-		C13 Cu 50	4932459528
	70	-	-	-		C13 Cu 70	4932459529
	10 - 10	-	-	-		C13 Cu 10	4932459530
	10-16 / 10-25 / 35-35	-	-	-		C13 Cu 10-35	4932459531
	25 - 50 / 50 - 50	-	-	-		C13 Cu 25-50	4932459532
	35 - 70	-	-	-		C13 Cu 35-70	4932459533
H-press	70	-	-	-		HAH13 Cu 70	4932459534
Oval 	95	-	-	-		HAH13 Cu 95	4932459535
	120	-	-	-		HAH13 Cu 120	4932459536
Doubled pressed cable lugs	50	-	-	-		DP13 Cu 2x50	4932459537
Oval 	70	-	-	-		DP13 Cu 2x70	4932459538
	95	-	-	-		DP13 Cu 2x95	4932459539
Hex	25	E140	NF22 E140	4932479394		-	-
Hex 	50	E173	NF22 E173	4932479395		-	-
	95	E215	NF22 E215	4932479398		-	-
NF C 20-130 to press copper cable lugs	16	16	NF22 Cu 16	4932451733		NF13 Cu 16	4932459453
	25	25	NF22 Cu 25	4932451734		NF13 Cu 25	4932459454
	35	35	NF22 Cu 35	4932451735		NF13 Cu 35	4932459455
Hex 	50	50	NF22 Cu 50	4932451736		NF13 Cu 50	4932459456
	70	70	NF22 Cu 70	4932451737		NF13 Cu 70	4932459457
	95	95	NF22 Cu 95	4932451738		NF13 Cu 95	4932459458
	120	120	NF22 Cu 120	4932451739		NF13 Cu 120	4932459459
	150	150	NF22 Cu 150	4932451740		NF13 Cu 150	4932459460
	185	185	NF22 Cu 185	4932451741		NF13 Cu 185	4932459461
	240	240	NF22 Cu 240	4932451742		NF13 Cu 240	4932459462
	300	300	NF22 Cu 300	4932451743		NF13 Cu 300	4932459463
	400	400	-	-		NF13 Cu 400	4932459464

FOR MORE INFORMATION ABOUT CABLE CRIMPING DIES, VISIT MILWAUKEETOOL.LV

PUNCHING HOLES - 3,0 MM STEEL / 2,5 MM STAINLESS STEEL

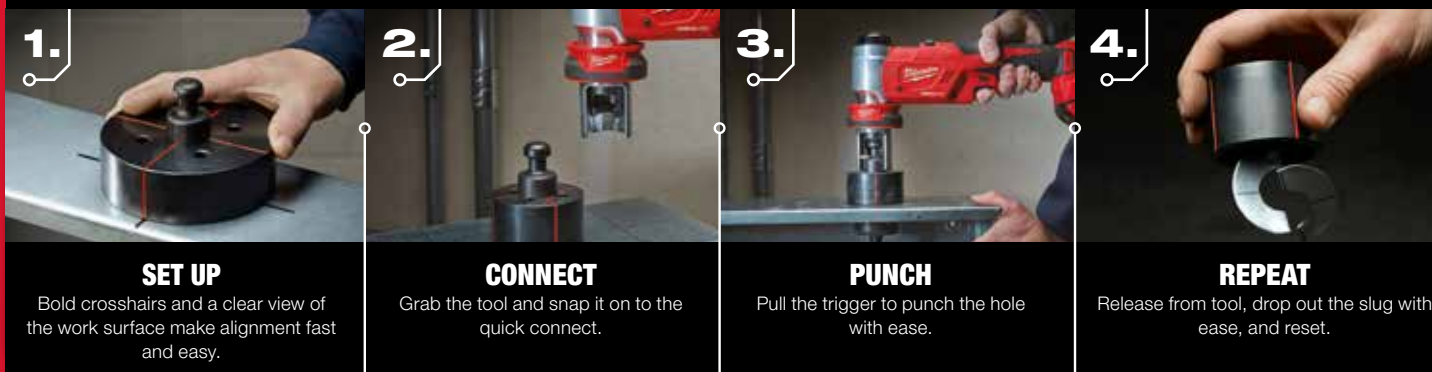

19,0 MM (¾")

Pilothole of 20.5 - 22 mm is required. Use for: PG16, M32, M40, M50, M63 punches & dies

QUICK CONNECTOR



M18 HKP-201CA | ART. NR. **4933451204**

M18 FORCELOGIC™ HYDRAULIC KNOCKOUT PUNCH

FEATURES:

- FORCE LOGIC™ hydraulic knockout punch is the most compact and lightweight tool on the market with 60 kN of force
- The easiest way to punch - for fast, accurate, round, and burr free holes
- Highest accuracy due to industry's finest exact alignment system for dies
- Best balanced tool and easiest control due to one hand operation
- Tool punches up to Ø100 mm holes into 3.0 mm mild steel or 2.5 mm stainless steel
- Compatible with most common punches and dies available on market
- Supplied with 2,0 Ah REDLITHIUM™ battery, 40 min. charger, 7/16" draw stud, ¾" draw stud, quick connector, ball pull, adapter, kitbox and the following punches and dies: M16, M20, M25, M32 ja M40



ACCESSORIES FOR M18 HKP

Set	Ø (mm)	Art. Nr.
Punch M16	16,2	4932430841
Punch PG16	22,5	4932430843
Punch M20	20,4	4932430842
Punch PG21	28,3	4932430845
Punch M25	25,4	4932430844
Punch M32	32,5	4932430846
Punch M40	40,5	4932430847
Punch M50	50,5	4932430848
Punch M63	63,5	4932430849
Draw stud	11,1 mm	49162680
Draw stud	19 mm	49162681

Set	Ø (mm)	Art. Nr.
Die M16	16,2	4932430913
Die PG16	22,5	4932430915
Die M20	20,4	4932430914
Die PG21	28,3	4932430917
Die M25	25,4	4932430916
Die M32	32,5	4932430918
Die M40	40,5	4932430919
Die M50	50,5	4932430920
Die M63	63,5	4932430921

ALSO AVAILABLE WITHOUT PUNCHES AND DIES:

M18 HKP-201C | ART. NR. **4933451202**

M18 FORCELOGIC™ HYDRAULIC KNOCKOUT PUNCH

- Supplied with 2,0 Ah REDLITHIUM™ battery, 40 min. charger, 7/16" draw stud, ¾" draw stud, quick connector, ball pull, adapter and kitbox



M18 ONEFHIWH716-0X | ART. NR. 4933479152

M18 FUEL ONE-KEY™ 7/16" HEX HIGH TORQUE IMPACT WRENCH**FEATURES:**

- Our MILWAUKEE® M18 FUEL™ 7/16" hex utility high torque impact wrench with ONE-KEY™ is the perfect match for our 7/16" accessories range giving you the power when needed in larger wood application
- With up to 1017 Nm max torque, this battery powered impact wrench gives you more power to effortlessly complete your applications or the removal of rusted and corroded hardware
- The extended handle offers you increased grip surface, perfect when wearing safety gloves for improved comfort, less fatigue, and balanced manoeuvrability
- Equipped with a QUIK-LOK™ chuck, providing faster and easier bit changes
- The integrated lanyard loop allows you to easily transfer and store the tool
- ONE-KEY™ tool tracking & security

INCLUDES:

M18 ONEFHIWH716

KITBOX




SOCKET ADAPTER:
7/16" HEX - 1/2" SQUARE
M18 ONEFHIWH716

4932480586

REDLITHIUM™**IMPACT WOOD AUGER BITS**

Suitable for use with all types of corded / cordless drills including impact wrenches. Drilling with an impact wrench enables drilling holes with less effort, one hand drilling, drilling up a ladder and above head height with less risk of injury from the tool clutching out. Special zone hardening process ensures an extra hard shank, durable tip and perfectly flexible bit body. 20° rake angle of the lead cutting edge creates a path for easy chip ejection. Polished and powder coated flute design produces a non-stick surface for increased chip ejection, reduced chip clogging and higher selffeeding capability.

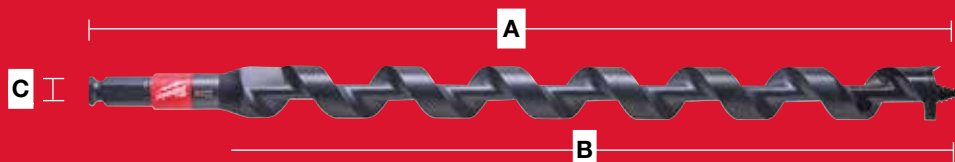

Diameter Ø (mm)	Total length (mm) A	Working length (mm) B	Shank reception	Art. Nr.
14	460	395	7/16" Hex	48136754
16	460	395	7/16" Hex	48136756
18	460	395	7/16" Hex	48136758
19	460	395	7/16" Hex	48136759
20	460	395	7/16" Hex	48136760
22	460	395	7/16" Hex	48136762
26	460	395	7/16" Hex	48136766
29	460	395	7/16" Hex	48136769
4 pc set in a pouch - ø 14 / 16 / 18 / 20	460	395	7/16" Hex	48136780

ACCESSORIES

Model	Art. Nr.
Adapter: 1/2" square – 7/16" and Hex 11 mm. For 7/16" selffeed bits and impact wood auger bits	48660061



M18 HUP700-121 | ART. NR. **4933471813**

M18 FORCELOGIC™ HYDRAULIC PUMP

FEATURES:

- FORCE LOGIC™ hydraulic utility pump powers every single acting 700 bar crimping, cutting or punching head attachment
- Significantly faster work cycles due to a large 1.6 litre total oil reservoir and 2x higher flow rate compared to other pumps
- 1.8 meter long corded controller enables user to work away from pump and can be extended up to 7 meters with accessory extension cords
- IP54 rated ingress protection with sealed battery door
- Well balanced lifting handle
- ONE-KEY™ tool tracking & security

INCLUDES:


REDLITHIUM™

ACCESSORIES FOR M18 HUP700:

1,8 M EXTENSION CORD FOR CONTROLLER

ART. NR. **49122775**


BUCKET HANGER

ART. NR. **49122776**


HYDRAULIC OIL 1 L

ART. NR. **4932472004**

L4 HSL-301 | ART. NR. **4933493968**

USB RECHARGEABLE HOT STICK LIGHT

FEATURES:

- Fast and easy fuse cutouts
- Two separate LED lights providing 350 lumens of halo lighting on high
- Adjustable output levels give the ability to light the fuse for up to 10 hours on one full battery charge
- Features a high impact aluminium body and IP54 rating for water and dust resistance
- USB Rechargeable battery can be recharged in the flashlight via USB-C or swapped out with additional USB Rechargeable batteries

INCLUDES:


**REDLITHIUM™
USB**

M18 BSBT-202X | ART. NR. **4933493289**

M18 SHEAR BOLT TOOL

Also available o-version M18 BSBT-0X | Art. Nr. 4933493288

FEATURES:

- Huge capacity up to a cable size of 1000 mm² or connector diameter of 78 mm
- Outstanding power with a max torque of 100 Nm
- Universal compatibility with the industry leading shear bolt lug manufacturers
- IEC-Tested, superior electrical connection integrity of lug and cable thanks to smooth tightening of the screws without an impact mechanism
- Tool free and quickly adjustable retaining bolts in 360° positions
- Included system attachments for optimal compatibility with 2-row shear bolt connectors
- Run time to shear off up to 80 screws on one M18™ 2.0 Ah battery
- Consistent speed of 60 RPM
- Supplied with 9x Impact rated 1/2" sockets (10/17 mm socket, 13/19 mm socket long, 5/6/8 mm Hex socket, 6/8 mm Hex socket long), 2x fork attachment (33-52 mm, 58-69 mm)



INCLUDES:



REDLITHIUM™

M18 STSO-0B | ART. NR. **4933492097**

M18 FORCE LOGIC™ STRUT SHEAR

FEATURES:

- Cleanest and safest way to cut strut profiles
- Compatible with 41x41 mm, 41x21 mm, 41x22 mm strut
- Compatible with commonly available strut manufacturers in the specified dimensions
- Shears pre- and hot dipped galvanised strut until 3.0 mm wall thickness



INCLUDES:



STRUT SHEAR DIES

	ART. NR.
Strut Shear Die Set 21x41 mm	49161316
Strut Shear Die Set 22x41 mm	49160078
Strut Shear Die Set 41x41 mm	49160158
Strut Shear Combination Die Set 21x41 mm	49161513
Strut Shear Combination Die Set 22x41 mm	49161578



**MILWAUKEE®
PIPE STAND**

MPS
4933472022



REDLITHIUM™

EASY WIRING

M18 FPFT

M18 FUEL POWERED FISH TAPE
CONTROL SWITCH

Switch between feeding or pulling cable

LARGE HANDLE

Ensures good grip

VARIABLE SPEED TRIGGER

For maximum control

**AUTOMATIC FEED:
FEED AND PULL BACK**

Do not pull the end into the drum!

MOTORIZED TRACTION
LARGE LOCK

Quick and easy, tool-free drum replacement

CABLE END

Feeds easily through pipes

EASY TO USE

The design of the drum prevents twisting of the cable

REDLITHIUM™

M18 FPFT-202 36 m ST SET | ART. NR. **4933471953**
M18 FUEL POWERED FISH TAPE STEEL SET

- 36 mm x 3 mm steel tape drum
- Supplied with 2 x 2.0 Ah REDLITHIUM™ battery, 59 min. M12-18FC


M18 FPFT-202 30 m NC SET | ART. NR. **4933471954**
M18 FUEL POWERED FISH TAPE NC SET

- 30 m non-conductive tape drum
- Supplied with 2 x 2.0 Ah REDLITHIUM™ battery, 59 min. M12-18FC



ALSO AVAILABLE AS A HAND TOOL:

FEATURES:

- High flexibility tape for easier feeding
- Thicker tape for better pushing
- Triple strand design, won't kink
- Low friction case for smooth pay out
- Square inner grip for easier winding


POLYESTER DRUM

Model	15 M	30 M
Art. Nr.	4932472118	4932472119


STEEL FISH DRUM

Model	7,5 M	15 M
Art. Nr.	4932472120	4932472121

MEASURING AND TESTING

2200-40

ART. NR. 4932352561

VOLTAGE DETECTOR

- Wide 50 - 1000 AC voltage range
- CAT IV 1000 V for highest safety rating
- Tip for checking outlets
- Green light indicates tool is on



2205-40

ART. NR. 4933416972

FORK METER FOR ELECTRICIANS

- TRMS always guarantees accurate readings
- High contrast, easy to read display provides clearer readings
- CAT III 1000 V/CAT IV 600 V for increased safety
- Supplied with electrical test lead set and 2 x AA batteries



2212-20

ART. NR. 4933447776

AUTO VOLTAGE / CONTINUITY TESTER

- Provides measurements down to decimals and displays them on an easy-to-read backlit LCD
- Automatically determines the need for voltage or continuity tests
- Supplied with belt clip, test lead set and 2 x AAA batteries



2216-40

ART. NR. 4933427309

DIGITAL MULTIMETER

- TRMS always guarantees accurate readings
- CAT III 600 V for increased safety
- Rugged over-moulding increases durability and user grip
- Supplied with electrical test lead set and 2 x AA batteries



2217-40

ART. NR. 4933416976

DIGITAL MULTIMETER

- TRMS always guarantees accurate readings
- High contrast, easy to read display provides clearer readings
- Cat III 600 V for increased safety
- Lo-Z. – always guaranteed accurate readings
- Supplied with electrical test lead set, thermocouple (dual banana) and 2 x AA batteries



2235-40

ART. NR. 4933427315

CLAMP METER

- TRMS always guarantees accurate readings
- CAT III 600 V for increased safety
- Rugged over-moulding increases durability and user grip
- Supplied with electrical test lead set and 2 x AA batteries



2267-40

ART. NR. 4933451906

TEMP-GUN™ INFRARED THERMOMETER

- 10:1 distance to spot ratio, a 1 m spot from 10 m away
- Up to -30°C to 400°C temperature range
- Premium LCD display for high readability



ISOLATED SCREWDRIVERS FOR ELECTRICIANS

VDE TRI-LOBE SCREWDRIVERS

- TESTED TO 10,000 VOLT AND GUARANTEED TO 1,000 VOLT
- ANTI-ROLL, 3 SIDED COLLAR ON THE HANDLE
- PERMANENT VISIBLE ID MARKINGS
- LANDYARD HOLE



PART OF MILWAUKEE®
ELECTRICAL TOOL RANGE



VDE TESTED

- Tested to 10, 000 V and guaranteed to 1,000 V

VDE TRI-LOBE SCREWDRIVERS



PERMANENT ID MARKINGS

- Do not wear out in use
- Quick tool identification



TRI-LOBE HANDLE

- High torque
- Maximum user comfort



SLIM SHANK DIAMETER

- Easy access

COMPACT HANDLE

- Easy up and down of pockets, high ease of use

LANDYARD HOLE

- For easy attachment



AVAILABLE IN SEVERAL VARIANTS AND SIZES:

Type	Description	Size	Art. Nr.
	Tri-Lobe VDE	PZ0 x 60	4932478724
	Tri-Lobe VDE	PZ1 x 80	4932478725
	Tri-Lobe VDE	PZ2 x 100	4932478726
	Tri-Lobe VDE	PZ3 x 150	4932478727
	Tri-Lobe VDE	T10 x 60	4932478728
	Tri-Lobe VDE	T15 x 75	4932478729
	Tri-Lobe VDE	T20 x 100	4932478730
	Tri-Lobe VDE	T25 x 100	4932478731
	Tri-Lobe VDE	T30 X 100	4932478732
	Tri-Lobe VDE	PH/S L1 x 80	4932478733
	Tri-Lobe VDE	PH/ SL2 x 100	4932478734
	Tri-Lobe VDE	PZ/ SL1 x 80	4932478735
	Tri-Lobe VDE	PZ/ SL2 x 100	4932478736

Type	Description	Size	Art. Nr.
	Tri-Lobe VDE	SL 0.4 x 2.5 x 75	4932478712
	Tri-Lobe VDE	SL 0.5 x 3 x 100	4932478713
	Tri-Lobe VDE	SL 0.6 x 3.5 x 100	4932478714
	Tri-Lobe VDE	SL 0.8 x 4 x 100	4932478715
	Tri-Lobe VDE	SL 1.0 x 5.5 x 125	4932478716
	Tri-Lobe VDE	SL 1.2 x 6.5 x 150	4932478717
	Tri-Lobe VDE	SL 1.6 x 8 x 175	4932478718
	Tri-Lobe VDE	PH0 x 60	4932478720
	Tri-Lobe VDE	PH1 x 80	4932478721
	Tri-Lobe VDE	PH2 x 100	4932478722
	Tri-Lobe VDE	PH3 x 150	4932478723

VDE PLIERS

- VDE (DIN EN/IEC 60900) certified tools. Tested to 10,000 volts and guaranteed to 1,000 volts
- Tested against cold to -40°
- Steel blades are fully forged, hardened and tempered for best durability
- Grey titanium surface finish is non reflective and ensures maximum corrosion resistance
- Ergonomic grip with softgrip for comfortable handling and good grip

VDE PLIERS:

Model	Size	Art. Nr.
VDE cable cutter	160 mm	4932464562
VDE cable cutter	210 mm	4932464563
VDE long round nose plier	205 mm	4932464564
VDE 45 deg. round nose plier	205 mm	4932464565
VDE diagonal cutter	145 mm	4932464566
VDE diagonal cutter	160 mm	4932464567
VDE Heavy Duty diagonal cutter	180 mm	4932464569
VDE Heavy Duty diagonal cutter	200 mm	4932464570
VDE combination plier	165 mm	4932464571
VDE combination plier	180 mm	4932464572
VDE wire stripping plier	160 mm	4932464573
VDE water pump plier	240 mm	4932464574

OTHER PLIERS:

Model	Size	Art. Nr.
7-in-1 combination pliers	0,75 - 6,0 mm	4932478554
Combination pliers	250 mm	48226100
Nipping pliers	180 mm	48226407
Cable cutter		48226104
S jaw pipe wrench	340 mm	4932464576
S jaw pipe wrench	430 mm	4932464577
5" TORQUE LOCK™ curved jaw	127 mm	4932472263
10" TORQUE LOCK™ curved jaw	250 mm	4932471725

CABLE CUTTERS

The steel blades are cast, hardened and heat-treated for best durability

Precision fabricated joints for optimal power transmission

Grey titanium surface finish is non reflective and ensures maximum corrosion resistance



VDE certified - Tested to 10,000 volts and guaranteed to 1,000 volts

Ergonomic grip with softgrip



ALSO AVAILABLE AS A 3-PIECE PLIER SET

INCLUDES:

DIAGONAL CUTTER - 160 MM
LONG NOSE PLIER - 205 MM
COMBI PLIER - 180 MM
 4932464575



VISIT MILWAUKEETOOL.LV TO SEE THE FULL RANGE



Nothing but **HEAVY DUTY.**[™]



**DISCOVER OUR
RANGE OF
HAND TOOLS,
STORAGE SOLUTIONS,
LIGHTING, PPE,
WORKWEAR AND
HEATED GEAR.**



Register online for your extended warranty:



Milwaukee Tool

v/ Techtronic Industries Nordic ApS
Stamholmen 147,1 · DK-2650 Hvidovre
Phone +358 800 109000

milwaukeetool.lv

All data incl. service and warranty conditions as well as product range are subject to change without notice. Pictures not binding. No liability for printing errors or mistakes.
1/24 – Copyright 2024 – Milwaukee Tool.